

User Manual



TP100P

4K Compliant HDBaseT™ 330 feet –
HDMI® Extender



All Rights Reserved

Version: TP100P_2016V1.0

Preface

Read this user manual carefully before using this product. Pictures shown in this manual is for reference only, different model and specifications are subject to real product.

This manual is only for operation instruction only, not for any maintenance usage. The functions described in this version are updated till December 2016. Any changes of functions and parameters since then will be informed separately. Please refer to the dealers for the latest details.

All product function is valid till 2016-12-5.

Trademarks

Product model and logo are trademarks. Any other trademarks mentioned in this manual are acknowledged as the properties of the trademark owner. No part of this publication may be copied or reproduced without prior written consent.

FCC Statement

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. It has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a commercial installation.

Operation of this equipment in a residential area is likely to cause interference, in which case the user at their own expense will be required to take whatever measures may be necessary to correct the interference

Any changes or modifications not expressly approved by the manufacture would void the user's authority to operate the equipment.



SAFETY PRECAUTIONS

To insure the best from the product, please read all instructions carefully before using the device. Save this manual for further reference.

- Unpack the equipment carefully and save the original box and packing material for possible future shipment
- Follow basic safety precautions to reduce the risk of fire, electrical shock and injury to persons.
- Do not dismantle the housing or modify the module. It may result in electrical shock or burn.
- Using supplies or parts not meeting the products' specifications may cause damage, deterioration or malfunction.
- Refer all servicing to qualified service personnel.
- To prevent fire or shock hazard, do not expose the unit to rain, moisture or install this product near water.
- Do not put any heavy items on the extension cable in case of extrusion.
- Do not remove the housing of the device as opening or removing housing may expose you to dangerous voltage or other hazards.
- Install the device in a place with fine ventilation to avoid damage caused by overheat.
- Keep the module away from liquids.
- Spillage into the housing may result in fire, electrical shock, or equipment damage. If an object or liquid falls or spills on to the housing, unplug the module immediately.
- Do not twist or pull by force ends of the optical cable. It can cause malfunction.
- Do not use liquid or aerosol cleaners to clean this unit. Always unplug the power to the device before cleaning.
- Unplug the power cord when left unused for a long period of time.
- Information on disposal for scrapped devices: do not burn or mix with general household waste, please treat them as normal electrical wastes.

Contents

- 1. Introduction 1
 - 1.1 Introduction to TP100P 1
 - 1.2 Features 1
 - 1.3 Package List 2
- 2. Product Appearance 3
 - 2.1 TP100PT 3
 - 2.2 TP100PR 4
- 3. System Connection 5
 - 3.1 Usage Precautions 5
 - 3.2 System Diagram 5
 - 3.3 Connection Procedure 5
 - 3.4 Application 6
 - 3.5 Twisted Pair Cable Connection 6
- 4. Specification 7
 - 4.1 Supported Resolution 8
- 5. Panel Drawing 9
- 6. Troubleshooting & Maintenance 10
- 7. After-sales Service 11

1. Introduction

1.1 Introduction to TP100P

TP100P is a 4K compliant Transmitter (TP100PT) –Receiver (TP100PR) set made to extend Ultra HD 4K, digital audio, wide-band IR and power over Ethernet (PoE) over a cost effective cat6 cable. It supports computer resolutions up to 1920x1200, HD1080P/60 with Deep Color. This HDCP compliant extender routes distances up to 330 feet using HDBaseT™ Lite technology. Ideal for digital signage applications or routing uncompressed HDMI A/V signals over inexpensive CAT6 in boardrooms, conference rooms and classrooms for far-end projectors. The power from TP100PT is supplied to TP100PR requiring no power on TP100PR, since PoE is supported; therefore only one power supply is needed.

Note: We recommend using a metal STP connector for RJ-45. The shielded layer of cable must be connected to the connector's metal shell for zero EMI noise and excellent transmission

1.2 Features

- Supports full HD: Delivers high-resolution image (1080p 3D, 4Kx2K)
- Maximum transmission distance is 330 ft. (100 m) for 1080p and 131 ft. (40m) for 4Kx2K over single CAT5e/CAT6 cable
- High Bandwidth: 10.2Gps.
- HDTV Compatible, use HDMI1.4 and HDCP compliant.
- Supports PoE& CEC.
- Uses HDBaseT technology for extended capability and reliability
- Bi-directional IR control
- LED indicators show work status.

Note: Please use a CAT5e or CAT6 cable with low impedance (Shielded twisted pair will be better and should be well grounded) for good transmission effect.

4K Compliant HDBaseT™ Extender


1.3 Package List

- 1 x TP100P (including TP100PT and TP100PR)
- 4 x detachable mounting ears
- 4 x screws
- 8 x plastic cushions
- 1 x power adapter (DC 12V 1A)
- 1 x user manual

Notes: Please confirm if the product and the accessories are all included, if not, please contact with the dealers.

2. Product Appearance


2.1 TP100PT

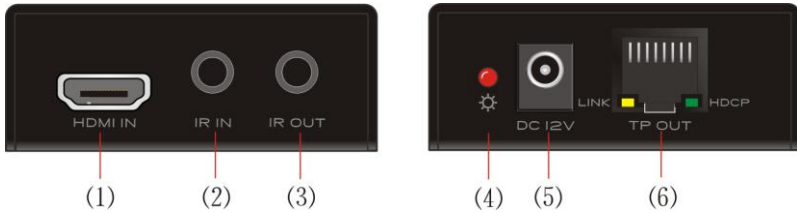

- 1) HDMI IN: Connect to HDMI source.
- 2) IR IN: Connect to an IR receiver, the IR signal received from this port can only send out via TP100PR.
- 3) IR OUT: Connect with IR emitter; TP100PR receives the sent IR signals.
- 4) Power Indicator: illuminate when power up
- 5) DC 12V: Connect with power supply, energize both TP100PT and TP100PR (PoE solution) synchronously.
- 6) TP OUT: Connect to the TP IN socket on TP100PR via CAT5e/ CAT6 cable.

4K Compliant HDBaseT™ Extender

2.2 TP100PR

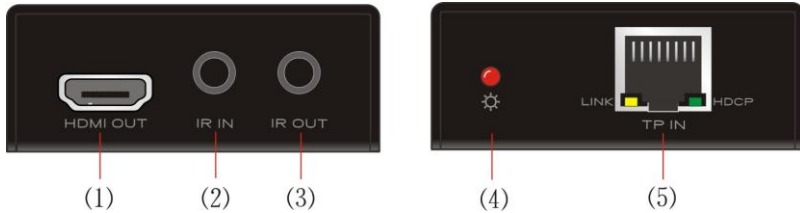

- 1) HDMI Out: Connect to HDMI display.
- 2) IR IN: Connect to an IR receiver, the IR signal received from this port can only send out via TP100PT.
- 3) IR OUT: Connect with IR emitter; TP100PT receives the sent IR signals.
- 4) Power Indicator: illuminate when power up
- 5) TP IN: Connect to the HDBaseT port on TP100PT via CAT5e/ CAT6 cable.

Note: TP100P boasts 2 indicators to show real-time operation information:


Indicator	Function	Details
LINK	Indicate linking status of TP100PT and TP100PR.	Connected: Illuminate Disconnected: Off
HDCP	Show HDCP compliant status	HDCP Compliant: Illuminate; Not HDCP Compliant: Blink. Disconnected: Off

3. System Connection

3.1 Usage Precautions

- 1) System should be installed in a clean environment and has a prop temperature and humidity.
- 2) All of the power switches, plugs, sockets and power cords should be insulated and safety.
- 3) All devices should be connected before power on.
- 4) The Cat5e/Cat6 terminations for HDBaseT devices should be a straight-thru TIA/EIA T568B standard.

3.2 System Diagram

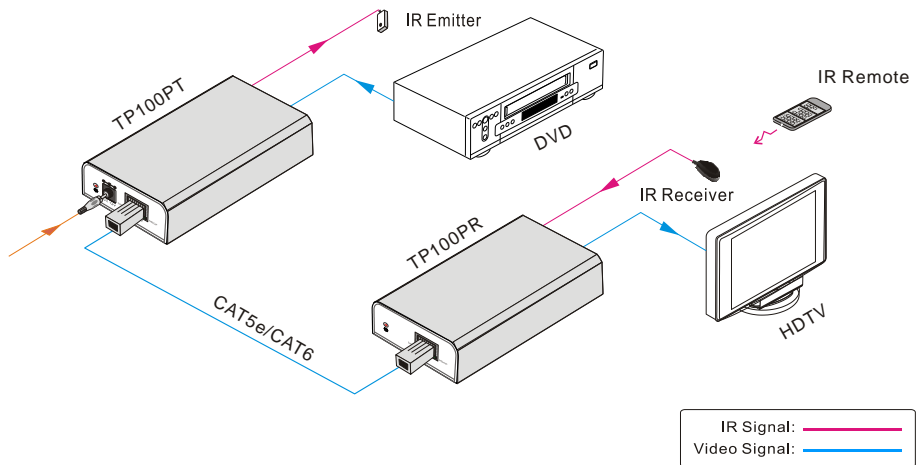

3.3 Connection Procedure

- Step1.** Connect HDMI source (such as Blue-ray DVD) to **HDMI In** port of TP100PT with an HDMI cable.
- Step2.** Connect **TP OUT** port of TP100PT to **TP IN** port of TP100PR through a CAT5e/CAT6 cable.
- Step3.** Connect a HDMI displayer (such as HDTV) to **HDMI Out** port of TP100PR with HDMI cable.
- Step4.** When using the bi-directional IR control, do the following.
 - a) Connect the IR emitter at either end to the **IR OUT** port on either TP100PT or TP100PR.
 - b) When using a powered IR receiver, connect via a 3.5 mm stereo plug to the **IR IN** on either TP100PR or TP100PT.
- Step5.** Connect with DC12V power adaptor to the power port of TP100PT; TP100PR will be empowered synchronously with PoE solution.

4K Compliant HDBaseT™ Extender


3.4 Application

The TP100P Set has a good application in various occasions, such as computer realm, monitoring, big screen displaying, meeting room, education and bank & securities institution etc.

3.5 Twisted Pair Cable Connection

The Cat5e/Cat6 terminations for HDBaseT devices should be a straight thru TIA/EIA T568B standard. TIA/EIA T568A standard is NOT recommended.

TIA/EIA T568A		TIA/EIA T568B	
Pin	Cable color	Pin	Cable color
1	Green white	1	Orange white
2	Green	2	Orange
3	Orange white	3	Green white
4	Blue	4	Blue
5	Blue white	5	Blue white
6	Orange	6	Green
7	Brown white	7	Brown white
8	Brown	8	Brown
1st Ground	4--5	1st Ground	4--5
2nd Ground	3--6	2nd Ground	1--2
3rd Group	1--2	3rd Group	3--6
4th Group	7--8	4th Group	7--8

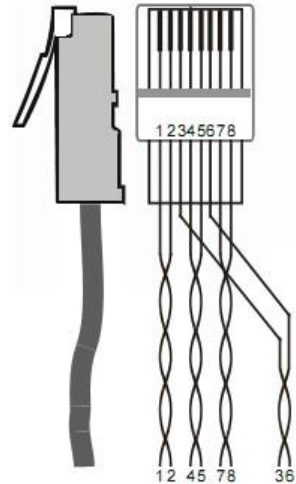

Note: To make the best out of HDMI transmission, cable connectors MUST be metallic; the shielded layer of cable MUST be connected to the connector's metal shell.

4K Compliant HDBaseT™ Extender

4. Specification

Model	TP100PT	TP100PR
Spec		
Input		
Input Signal	1 HDMI, 1 IR	1 IR, 1 RJ-45
Input Connector	HDMI female 3.5mm mini jack	3.5mm mini jack RJ-45
Video Signal	HDMI1.4	HDMI1.4
Audio	Digital audio, transmit through HDMI audio	Digital audio, transmit through HDMI audio
Output		
Output	1 RJ-45, 1 IR	1 HDMI, 1 IR
Output Connector	RJ-45 3.5mm mini jack	HDMI female 3.5mm mini jack
Video signal	HDMI1.4	HDMI1.4
Transmission Mode	HDBaseT	HDBaseT
General		
Resolution Range	800x600@60Hz~4K×2K	
Transmission Distance	Maximum distance 330 ft. (100 m)	
SNR	>70dB@ 100MHz-100M	
Bandwidth	10.2Gbps	
THD	<0.005%@1KHz	
HDMI Standard	Support HDMI1.4, and HDCP	
Impedance	75Ω	
Temperature	0~ 50℃	
Reference Humidity	10% ~ 90%	
Power Supply	DC12V, 1A	
Power Consumption	9.6W	
Dimension (W*H*D)	61x 24x 120 mm	61x 24x 120 mm
Weight	0.28Kg	0.28Kg


NOTE: All nominal levels are at ±10%.

4.1 Supported Resolution


Format	Resolution
HDMI	480I, 480P, 576I, 576P, 720P, 1080I, 1080P, 4Kx2K, 1080P 3D
DVI	640x480@60Hz, 640x480@72Hz, 640x480@75Hz, 800x600@60Hz, 800x600@72Hz, 800x600@75Hz, 1024x768@60Hz, 1024x768@70Hz, 1024x768@75Hz, 1280x720@60 Hz, 1280x1024@60Hz, 1280x1024@75Hz, 1600x1200@60Hz, 1920x1080@60Hz, 1920x1200@60Hz

Note: TP100P supports 4k&1080p 3D HDMI signal, please implement quality HDMI cables compliant with HDMI1.4 for reliable transmission when using.

5. Panel Drawing

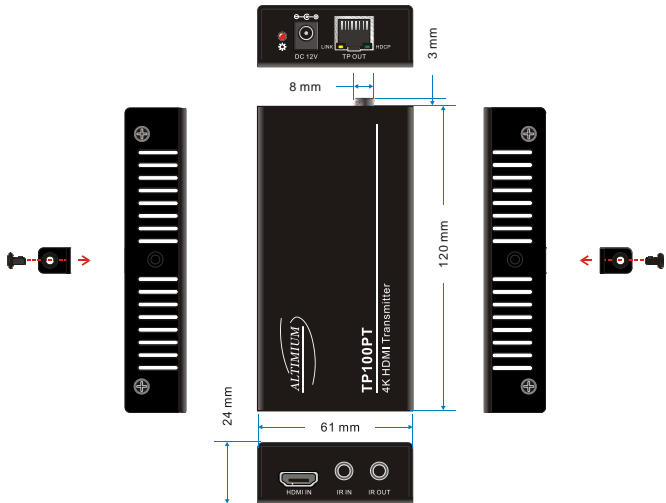

5-1 TP100PT

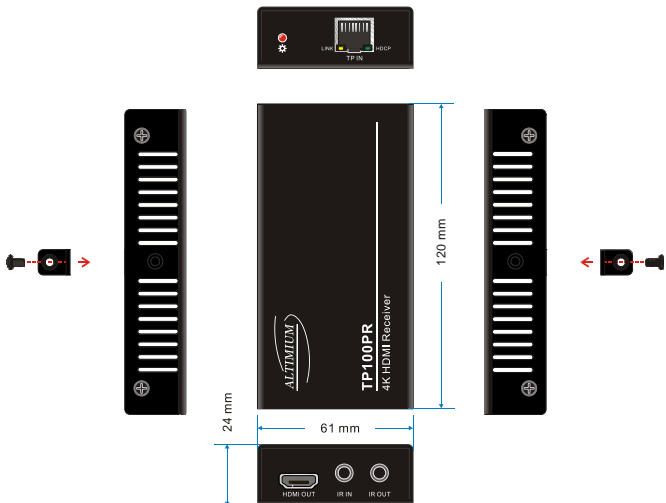

5-2 TP100PR

6. Troubleshooting & Maintenance

- **No image on display:**

- Ensure that the display device has been set to the correct input.
- Ensure that the HDMI cables used for both the source/transmitter and the receiver/display are properly connected and are working. Test the HDMI cables directly from a source to display and ensure their operation.
- Ensure that the Cat5e/Cat6 cable has not been damaged and that it has been terminated correctly with T568B on both ends. A temporary length of Cat5e/Cat6 can be used for testing to ensure that the devices are all compatible and working properly.

- Ensure proper grounding of the power supply.

- Known issues with HDMI 1.2 source devices:

Older compatibility (HDMI 1.2) may result in HDBaseT transmission issues. Please contact Technical Support for a solution to these issues.

- **Color lose or poor picture quality:**

- Ensure that the HDMI cables used for both the source and transmitter and the receiver and display are properly connected and are of good quality. Test the HDMI cables directly from a source to display and ensure their picture quality.
- Ensure proper grounding of the power supply.
- If the static becomes stronger or picture quality becomes worse when connecting the video connectors, this may be due to improper grounding.
- Check the grounding and make sure all the components are properly grounded to a common ground. Improper grounding may cause damage to the receiver.

If your problem persists after following the above troubleshooting steps, seek further help from authorized dealer or our technical support.

7. After-sales Service

If there appear some problems when running the device, please check and deal with the problems reference to this user manual. Any transport costs are borne by the users during the warranty.

1. Product Limited Warranty: We warrant that our products will be free from defects in materials and workmanship for **three years**, which starts from the first day you buy this product (The purchase invoice shall prevail).

Proof of purchase in the form of a bill of sale or receipted invoice which is evidence that the unit is within the Warranty period must be presented to obtain warranty service.

2. What the warranty does not cover:

- Warranty expiration.
- Factory applied serial number has been altered or removed from the product.
- Damage, deterioration or malfunction caused by:
 - Normal wear and tear
 - Use of supplies or parts not meeting our specifications
 - No certificate or invoice as the proof of warranty.
 - The product model showed on the warranty card does not match with the model of the product for repairing or had been altered.
 - Damage caused by force majeure.
 - Servicing not authorized
 - Any other causes which does not relate to a product defect
- Delivery, installation or labor charges for installation or setup of the product

3. Technical Support: Email to our after-sales department or make a call, please inform us the following information about your cases.

- Product version and name.
- Detailed failure situations.
- The formation of the cases.

Remarks: For any questions or problems, please try to get help from your local distributor.



ALTIMIUM

587 Avenue Blaise Pascal
77550 MOISSY-CRAMAYEL

Tél : 01.64.13.31.00

Fax: 01.60.29.62.70

Mail: contact@tesca-audio.com

Web: www.altimum.com