

TP422P-4K

Ultra-thin HDBaseT Extender



All Rights Reserved

Version: TP422P-4K_2016V1.1

Preface

Read this user manual carefully before using this product. Pictures shown in this manual is for reference only, different model and specifications are subject to real product.

This manual is only for operation instruction only, not for any maintenance usage. The functions described in this version are updated till August 2016. Any changes of functions and parameters since then will be informed separately. Please refer to the dealers for the latest details.

All product function is valid till 2016-8-31.

Trademarks

Product model and logo are trademarks. Any other trademarks mentioned in this manual are acknowledged as the properties of the trademark owner. No part of this publication may be copied or reproduced without the prior written consent.

FCC Statement

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. It has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a commercial installation.

Operation of this equipment in a residential area is likely to cause interference, in which case the user at their own expense will be required to take whatever measures may be necessary to correct the interference

Any changes or modifications not expressly approved by the manufacture would void the user's authority to operate the equipment.



SAFETY PRECAUTIONS

To insure the best from the product, please read all instructions carefully before using the device. Save this manual for further reference.

- Unpack the equipment carefully and save the original box and packing material for possible future shipment
- Follow basic safety precautions to reduce the risk of fire, electrical shock and injury to persons.
- Do not dismantle the housing or modify the module. It may result in electrical shock or burn.
- Using supplies or parts not meeting the products' specifications may cause damage, deterioration or malfunction.
- Refer all servicing to qualified service personnel.
- To prevent fire or shock hazard, do not expose the unit to rain, moisture or install this product near water.
- Do not put any heavy items on the extension cable in case of extrusion.
- Do not remove the housing of the device as opening or removing housing may expose you to dangerous voltage or other hazards.
- Install the device in a place with fine ventilation to avoid damage caused by overheat.
- Keep the module away from liquids.
- Spillage into the housing may result in fire, electrical shock, or equipment damage. If an object or liquid falls or spills on to the housing, unplug the module immediately.
- Do not twist or pull by force ends of the optical cable. It can cause malfunction.
- Do not use liquid or aerosol cleaners to clean this unit. Always unplug the power to the device before cleaning.
- Unplug the power cord when left unused for a long period of time.
- Information on disposal for scrapped devices: do not burn or mix with general household waste, please treat them as normal electrical wastes.

Table of Contents

1. Introduction	1
1.1 Introduction to Ultra thin HDBaseT Extender	1
1.2 Features	1
1.3 Package Contents	1
2. Panel Description	2
2.1 Transmitter	2
2.2 Receiver	3
2.3 Twisted Pair Cable Description	4
3. System Connection	5
3.1 Usage Precautions	5
3.2 System Diagram	5
3.3 Connection Procedure	5
3.4 Application	6
4. Specification	7
5. Panel Drawing	9
6. Troubleshooting & Maintenance	10
7. After-sales Service	11

1. Introduction

1.1 Introduction to Ultra-thin HDBaseT Extender

This product is an ultra-thin HDBaseT Extender set consist of transmitter (TX) and receiver (RX).

It distributes HDMI signal via CAT5e/CAT6a cable at 100m/PoH, and enables IR and RS232 passthrough to control remote displays. It also supports 4 Ethernet interface for network.

It provides a perfect long range transmission solution.

1.2 Features

- Ultra-thin design.
- The highest resolution is 4Kx2k/60Hz
- HDCP2.2 compliant.
- Maximum transmission distance is up to 70m for 4Kx2K
- Maximum transmission distance is up to 100m for 1080p
- Maximum extension distance is up to 100m for Ethernet.
- Support bi-directional PoH
- High bandwidth: 10.2Gbps
- Support IR/RS232 passthrough.
- Use HDBaseT technology.
- LED indicators show work status.

Note: Please use a CAT5e cable with low impedance (Shielded twisted pair will be better and should be well grounded) for good transmission effect.


1.3 Package Contents

- 1 x Transmitter
- 1 x Receiver
- 4 x Mounting ears
- 8 x Black Plastic cushions
- 4 x Screws
- 2 x RS232 cables
- 1 x Power adapter (DC 24V 1.25A)
- 1 x User manual

Notes: If you find any defective or missing parts, please contact your local dealer.

2. Panel Description

2.1 Transmitter

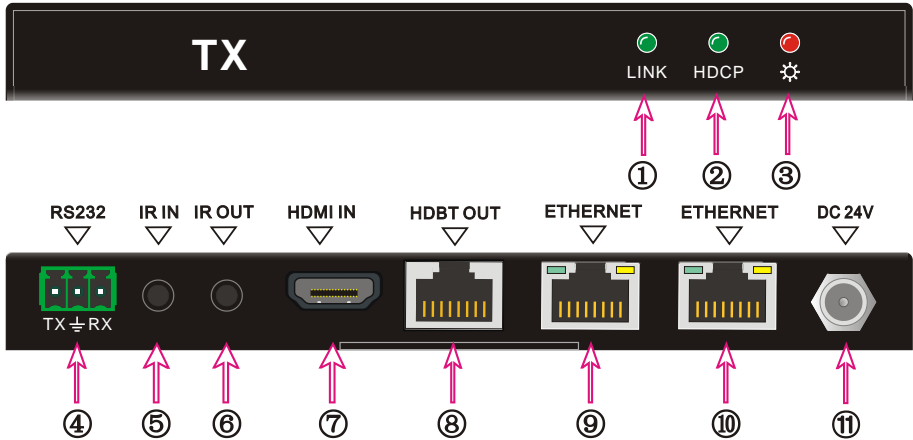


No.	Name	Description
①	LINK	HDBT Link status indicator: <ul style="list-style-type: none"> ➤ OFF: No Link ➤ GREEN: Link Successful ➤ Blinking GREEN: Link abnormal
②	HDCP	HDCP compliant indicator <ul style="list-style-type: none"> ➤ OFF: No HDMI traffic (no picture) ➤ GREEN: Traffic with HDCP. ➤ Blinking GREEN: Traffic without HDCP
③	Power	OFF: No power; RED: DC power present.
④	RS232	RS232 connector.
⑤	IR IN	Connect with 5V IR receiver (with carrier) to collect infrared signal, work with far-end IR OUT port
⑥	IR OUT	Connect with 5V IR Emitter to send infrared signal, work with far-end IR IN port
⑦	HDMI IN	Connect with HDMI source
⑧	HDBT OUT	Connect to the HDBT IN socket on the receiver via CAT5e/ CAT6a cable, support bi-directional PoH.
⑨	ETHERNET	100M Ethernet interface, when need to work in a LAN, one of these 4 ports (both the Ethernet ports of transmitter and receiver) should be used for internet access, and the others can
⑩	ETHERNET	

		be connected with computers. If they are well connected, the yellow LED indicators on the corresponding ports will keep blink and the green ones will keep on when working.
⑪	DC 24V	Connect with DC24V 1.25A power adaptor. (Not necessary if receiver connects with power).


Pictures shown in this manual are only for reference.

2.2 Receiver

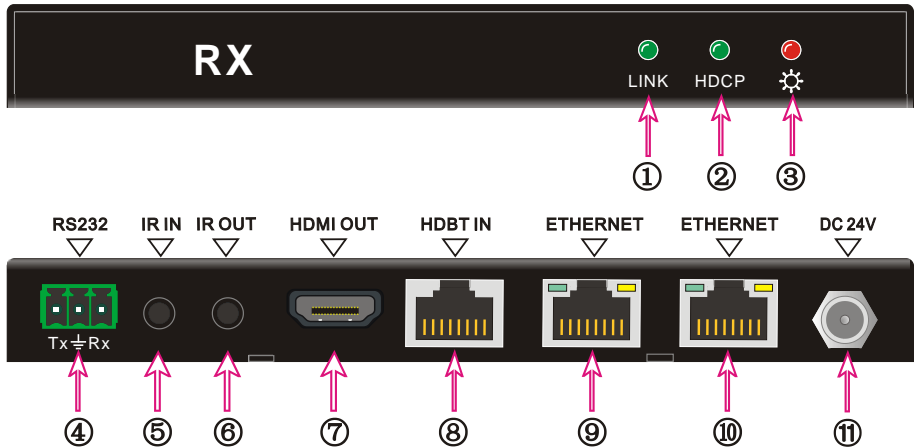

No.	Name	Description
①	LINK	HDBT Link status indicator: <ul style="list-style-type: none"> ➤ OFF: No Link ➤ GREEN: Link Successful ➤ Blinking GREEN: Link abnormal
②	HDCP	HDCP compliant indicator <ul style="list-style-type: none"> ➤ OFF: No HDMI traffic (no picture) ➤ GREEN: Traffic with HDCP. ➤ Blinking GREEN: Traffic without HDCP
③	Power	OFF: No power; RED: DC power present.
④	RS232	RS232 connector.
⑤	IR IN	Connect with 5V IR receiver (with carrier) to collect infrared signal, work with far-end IR OUT port
⑥	IR OUT	Connect with 5V IR Emitter to send infrared signal, work with far-end IR IN port
⑦	HDMI OUT	Connect with HDMI display


⑧	HDBT IN	Connect to the HDBT OUT socket on the transmitter via CAT5e/ CAT6a cable.
⑨	ETHERNET	Ethernet ports, when need to work in a LAN, one of these 4 ports (both the Ethernet ports of transmitter and receiver) should be used for internet access, and the others can be connected with computers. If they are well connected, the yellow LED indicators on the corresponding ports will keep blink and the green ones will keep on when working.
⑩	ETHERNET	
⑪	DC 24V	Connect with DC24V 1.25A power adaptor (Not necessary if transmitter connects with power).

 Pictures shown in this manual are only for reference.

2.3 Twisted Pair Cable Description

The twisted pair used in this extender **MUST** be a straight-through cable.

TIA/EIA T568A		TIA/EIA T568B	
Pin	Cable color	Pin	Cable color
1	green white	1	orange white
2	green	2	orange
3	orange white	3	green white
4	blue	4	blue
5	blue white	5	blue white
6	orange	6	green
7	brown white	7	brown white
8	brown	8	brown
1st Ground	4--5	1st Ground	4--5
2nd Ground	3--6	2nd Ground	1--2
3rd Group	1--2	3rd Group	3--6
4th Group	7--8	4th Group	7--8

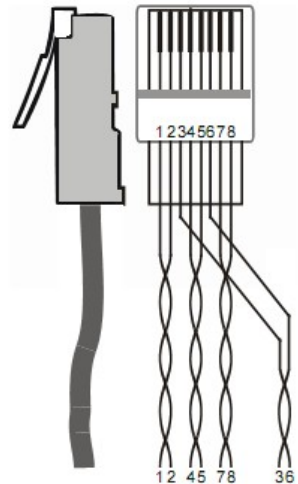

Notice: Cable connectors **MUST** be metal one, the shielded layer of cable **MUST** be connected to the connector's metal shell, to make a better


transmission.

3. System Connection

3.1 Usage Precautions

- 1) System should be installed in a clean environment and has a prop temperature and humidity.
- 2) All of the power switches, plugs, sockets and power cords should be insulated and safety.
- 3) All devices should be connected before power on.
- 4) Use shielded straight-thru CAT5e/CAT6a cable with TIA/EIA T568B terminations for good transmission effect.

3.2 System Diagram

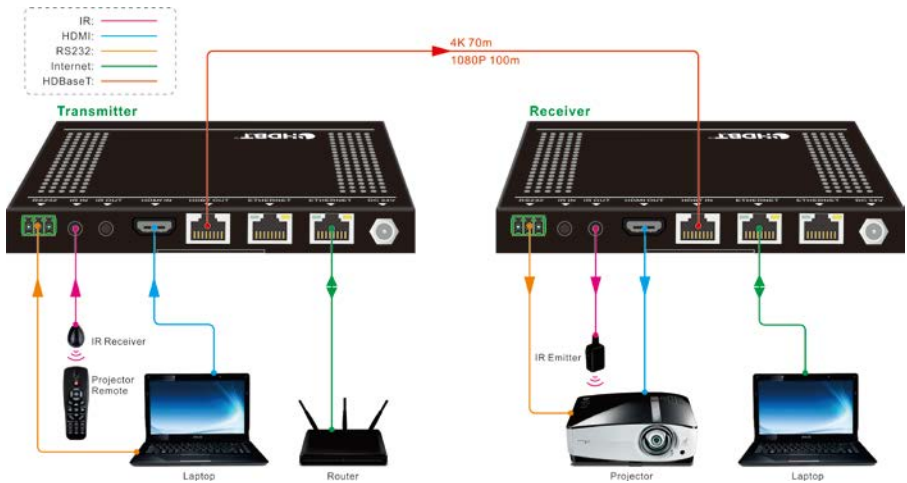

3.3 Connection Procedure

- Step1.** Connect HDMI source (such as DVD player) to HDMI IN port of the transmitter with HDMI cable.
- Step2.** Connect HDBT OUT port of transmitter and HDBT IN port of receiver with single CAT5e/CAT6a cable.
- Step3.** Connect HDMI displayer (such as HDTV) to HDMI OUT port of receiver with HDMI cable.
- Step4.** Both transmitter and receiver have IR IN and OUT. When one model use for IR signal receiver, the IR signal must be sent out by the other model.
For example: When “IR IN” of receiver connects with an IR receiver, the IR Emitter must be connected to “IR OUT” of transmitter.
- Step5.** To set as a LAN, one of the four ETHERNET ports of transmitter and receiver should be used for Internet access, and the others can be connected with

computers.

Step6. Connect the RS232 port of the computer and the RS232 port of transmitter or receiver (any one is able to work as the RS232 signal can be transmitted bi-directionally) by using a RS232 cable.

Step7. Connect with DC24V power adaptor(s) separately or only connect power adaptor to transmitter or receiver.

3.4 Application

Ultra-thin HDBaseT Extender has a good application in various occasions, such as computer realm, monitoring, big screen displaying, meeting room, education and bank & securities institution etc

4. Specification


Model Spec	Transmitter	Receiver
Input		
Input Signal	1 HDMI, 1 IR in, 1 RS232	1 IR in, 1 HDBaseT, 1 RS232
Input Connector	1 HDMI female 1 3.5mm mini jack for IR in 1 3P captive connector	1 3.5mm mini jack for IR in 1 RJ-45 1 3P captive connector
Video Signal	HDMI1.4	HDMI1.4
Audio	Digital audio, transmit through HDMI audio	Digital audio, transmit through HDMI audio
Output		
Output	1 HDBaseT, 1 IR out, 1 RS232	1 HDMI, 1 IR out, 1 RS232
Output Connector	1 RJ-45 1 3.5mm mini jack for IR out 1 3P captive connector	1 HDMI female 1 3.5mm mini jack for IR out 1 3P captive connector
Ethernet Port		
Connector	2 Black RJ45, with a dual color indicator(Green & Yellow)	2 Black RJ45, with a dual color indicator(Green & Yellow)
Ethernet Transmission Speed	Adaptive 10M/100M (max), full duplex or half duplex.	
General		
Transmission Mode	HDBaseT	
Resolution	800x600@60Hz、1024x768@Hz、1280x720@60Hz、1280x1024@60Hz、1366x768@60Hz、1600x1200@60Hz、1920x1080@60Hz、1920x1200@60Hz、3D、4K×2K	
Transmission Distance	1080P ≤ 100m; 4K×2K ≤ 70m	
Bandwidth	10.2Gbps	
HDMI Standard	HDMI1.4 & HDCP2.2	
Impedance	75Ω	
Temperature	0~ 50℃	
Humidity	0% ~ 90%	
Power Consumption	10W	

Ultra-thin HDBaseT Extender


Power Supply	Input: 100VAC~240VAC, 50/60Hz; Output: 24VDC 1.25A	
Dimension (W*H*D)	152mmx16.2mmx104mm	152mmx16.2mmx104mm
Net Weight	235g	241g

NOTE: All nominal levels are at $\pm 10\%$.

5. Panel Drawing

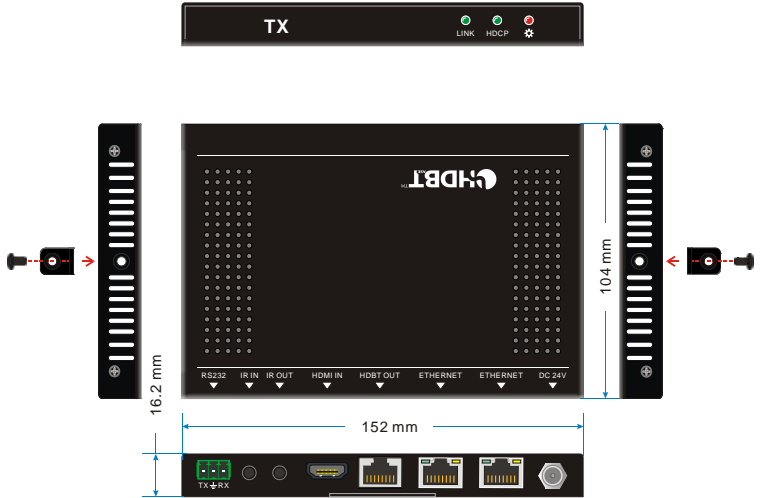

5-1 Transmitter

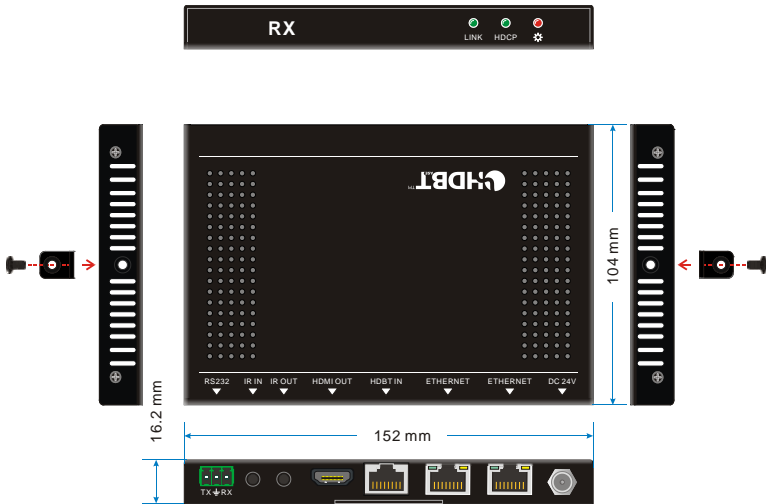

5-2 Receiver

6. Troubleshooting & Maintenance

Problems	Causes	Solutions
Output images in display show with ghost	Incorrect setting on the display	Check the display's setting
	A cable of bad quality	Try another high quality connection cable
No output image when switching	No signal at the input / output end	Check with oscilloscope or multimeter if there is any signal at the input / output end.
	Fail or loose connection	Make sure the connection is good
	The extender is broken	Send it to authorized dealer for repairing.
Cannot control the device by control device (e.g. a PC) through RS232 port	Wrong RS232 communication parameters	Make sure the RS232 communication parameters are correct.
	The device has already been broken	Send it to authorized dealer for repairing.
Cannot recognize device connected to the ETHERNET port	The connected device has the same IP address with the extender	Change the IP address of the extender or the connected device.
Static becomes stronger when connecting the video connectors	Bad grounding	Check the grounding and make sure it is connected well.
Cannot control the device by RS232 / IR	The device has already been broken	Send it to authorized dealer for repairing.

If your problem persists after following the above troubleshooting steps, seek further help from authorized dealer or our technical support.

7. After-sales Service

If there appear some problems when running the device, please check and deal with the problems reference to this user manual. Any transport costs are borne by the users during the warranty.

1) Product Limited Warranty: We warrants that its products will be free from defects in materials and workmanship for **three years**, which starts from the first day the product leaves warehouse (check the SN mark on the product).
Proof of purchase in the form of a bill of sale or receipted invoice must be presented to obtain warranty service.

2) What the warranty does not cover:

- Warranty expiration.
- Factory applied serial number has been altered or removed from the product.
- Damage, deterioration or malfunction caused by:
 - Normal wear and tear
 - Use of supplies or parts not meeting our specifications
 - No certificate or invoice as the proof of warranty.
 - The product model showed on the warranty card does not match with the model of the product for repairing or had been altered.
 - Damage caused by force majeure.
 - Servicing not authorized
 - Any other causes which does not relate to a product defect
- Delivery, installation or labor charges for installation or setup of the product

3) Technical Support: Email to our after-sales department or make a call, please inform us the following information about your cases.

- Product version and name.
- Detailed failure situations.
- The formation of the cases.

Remarks: For any questions or problems, please try to get help from your local distributor.



ALTIMIUM

587 Avenue Blaise Pascal 77550 MOISSY-CRAMAYEL

Tél : 01.64.13.31.00

Fax: 01.60.29.62.70

Mail: contact@tesca-audio.com

Web: www.altimum.com